



Cloverdale Paint

# SharkSkin™

THE ULTIMATE IN WATER-REPELLANT SCUFF-RESISTANT PROTECTION

## Deck & Siding

SOLID HIDE ACRYLIC URETHANE WOOD STAIN

WATER-REPELLANT • SCUFF-RESISTANT • MADE FOR CANADIAN CLIMATES

THERE'S NOTHING  
TOUGHER !




Made in Canada

• SUPERIOR ADHESION

## What Makes SharkSkin So Tough?

A shark's skin is made of a matrix of tiny, tooth-like scales that act as armour and provide the shark with the lowest friction so it can glide through the water with the highest efficiency. As an inspiration for the creation of the 'ultimate' in deck stains, Cloverdale Paint looked to this skin structure to develop its unique SharkSkin™ formula, which cross-links a 100% Acrylic Resin providing protection from weather and UV rays, with Urethane for toughness and water-resistance, and the wood-friendly characteristics of Linseed Oil that penetrates and 'anchors' the stain into the pores of the wood.

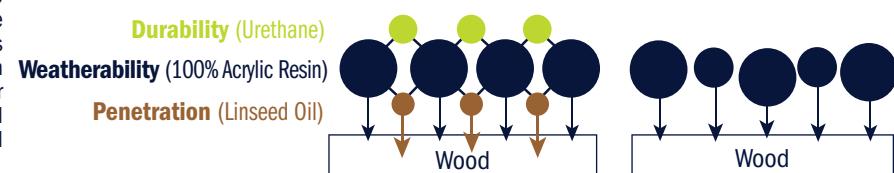

## The Very Best for Decks & Siding

Designed specifically for Canadian weather climates. Sun-drenched Summers and tough Canadian Winters - from wet coastal Vancouver Island through the frigid temperatures, snow and ice through Alberta, into the Prairies and Eastern Canada, SharkSkin™ Deck & Siding stain was developed to withstand these wide ranging conditions using the latest hybrid waterborne alkyd technology. Home owners and professional applicators alike can rest assured that decks and siding remain protected and beautified with SharkSkin™ stain, that provides superior adhesion, durability and resistance to cracking, peeling and blistering.

## Superior Application Properties



Premium quality SharkSkin™ Solid Hide Deck & Siding stain is formulated as a heavier-body coating that provides superior hide, flow, and leveling for the applicator. As compared to a conventional stain, its rich, creamy texture hides the natural colour of the wood, masking imperfections and unwanted grain and colour variations to provide a painted look.

## Water and UV Protection



SharkSkin™ provides superior water-repellant and four times greater UV protection and weathering protection than conventional stains so decks and siding stay looking great for years. The use of a premium 100% Acrylic resin ensures that rain and moisture stays away from the wood and allows the wood to naturally expand and contract with the season.

## Hybrid Emulsion Technology



Cloverdale Paint is constantly researching new technologies to apply to its paints and stains. SharkSkin™ Solid Hide wood stain brings together the latest in coatings technology - the fusion of Urethane, Linseed Oil and a 100% Acrylic Resin to provide superior wood protection, adhesion to the surface, flexibility of the coating during seasonal changes, and the ultimate in durability and water-resistance from foot traffic and weather.

## 6/20 Year Guarantee



Cloverdale Paint warrants its 724-series SharkSkin™ Deck & Siding stain for 6 years on decks and 20 years on siding against cracking (except where the underlying wood has cracked) peeling, and blistering from the date of purchase where two full coats of 724-series SharkSkin™ solid hide stain are applied according to label instructions. For full details of the Limited Warranty, please see the SharkSkin™ product label available at your local Cloverdale Paint Store or Dealer.

### Cloverdale Paint

6950 King George Blvd, Surrey, BC V3W 4Z1  
Tel (604) 596-6261 [www.cloverdalepaint.com](http://www.cloverdalepaint.com)

#86289



100% Canadian Owned and Operated

## Technical Properties

### RECOMMENDED USES

Ideally suited for exterior wood decks, patios, stair treads or other horizontal surfaces. Also recommended for wood, composite or cement board siding, fences, deck railings, soffits, trim, exterior stucco or other cementitious surfaces. Also recommended for use on properly prepared previously painted surfaces.

### CERTIFICATIONS

GreenWise™  
Environment Canada VOC compliant

### BASES AVAILABLE

White Base 72403, Deep Base 72401, Clear Base 72404

### V.O.C.

Less than 150 g/L

### SOLIDS CONTENT

37% by Volume, 52% by Weight

### FILM THICKNESS (per coat)

Wet: 3.9 - 6.8 mils (100 - 170 microns)  
Dry: 1.5 - 2.5 mils (38 - 63 microns)

### DRY TIME

@ 20°C and 50% Relative Humidity  
Tack-free: 45 minutes, Re-Coat: 4 - 6 hours

### SPREAD / COVERAGE

240 - 400 ft²/gallon (5.9 - 9.8 m²/L), per coat

### APPLICATION TOOLS & TECHNIQUES

Brush: Synthetic bristle brush  
Roller: 10 - 20 mm roller sleeve  
H.V.L.P. Spray: 1.3 cap, 10 - 20 ps  
Airless Spray: 1,800 - 2,000 psi pressure, .013 - .015 tip  
Make sure to maintain a 'wet edge' when applying so that 'lap marks' do not appear in the dried film when stain has dried.

### THINNING / CLEAN-UP

Not normally recommended. For spray applications, thinning 10% with clean water is acceptable. Clean application equipment with warm, soapy water.



Visit [www.greenwisepaint.com](http://www.greenwisepaint.com)  
to view product standards.

For complete application instructions, please refer to Technical Data Sheet, available online at [www.cloverdalepaint.com](http://www.cloverdalepaint.com)

